


Makita Versatile 2kg Rotary Hammers



Comparison of Drilling Efficiency

Note: 1. It may differ under some conditions.
2. Numbers in the charts below are relative values when the capacities of Makita "HR2450" are indexed at 100.

Test conditions: Drilled in concrete with compressive strength of 40N/mm².

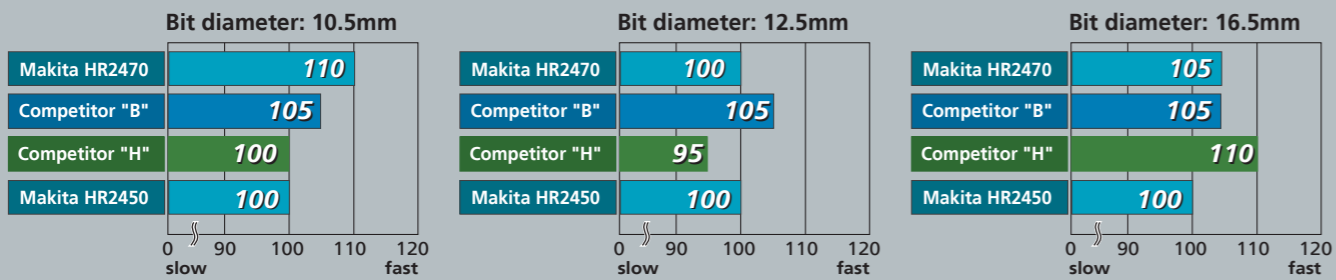


Rotary Hammer	HR2230, HR2460/F, HR2470/F/T/FT	325		
Double Insulation				
Variable Speed				
Reversing				
Torque Limiter				
Dust Collecting				
SDS-Plus Shank				
Carrying Case				
Built-in Job Light (HR2460F, HR2470F/FT only)				
Continuous rating Input	HR2230 710W	HR2460/F 780W	HR2470/F 780W	HR2470T/FT 780W
Capacity				
Concrete : (with diamond core bit)	65mm (2-9/16")	65mm (2-9/16")	65mm (2-9/16")	65mm (2-9/16")
Concrete : (with T.C.T. bit)	22mm (7/8")	24mm (15/16")	24mm (15/16")	24mm (15/16")
Steel :	13mm (1/2")	13mm (1/2")	13mm (1/2")	13mm (1/2")
Wood :	32mm (1-1/4")	32mm (1-1/4")	32mm (1-1/4")	32mm (1-1/4")
Impacts per minute	0-4,050ipm	0-4,500ipm	0-4,500ipm	0-4,500ipm
No load speed	0-1,050rpm	0-1,100rpm	0-1,100rpm	0-1,100rpm
Dimensions	357 x 84 x 214mm	362 x 84 x 214mm	370 x 84 x 214mm	394 x 84 x 214mm
Net weight	14" x 3-5/16" x 8-3/8"	14-1/4" x 3-5/16" x 8-3/8"	14-1/2" x 3-5/16" x 8-3/8"	15-1/2" x 3-5/16" x 8-3/8"
Power supply cord	2.4kg (5.4lbs)	2.5kg (5.6lbs)	2.6kg (5.9lbs)	2.8kg (6.3lbs)
	4.0m (13.1ft)	4.0m (13.1ft)	4.0m (13.1ft)	4.0m (13.1ft)
Standard Equipment Quick Change Drill Chuck (HR2470T/FT only), Depth Gauge, Side Grip (Tool does not come with bit.)				



Rotary Hammers

HR2230 22mm (7/8") HR2460/F 24mm (7/8")
HR2470/F/T/FT 24mm (7/8") "Combination Hammers"

Satisfy Professional's Needs

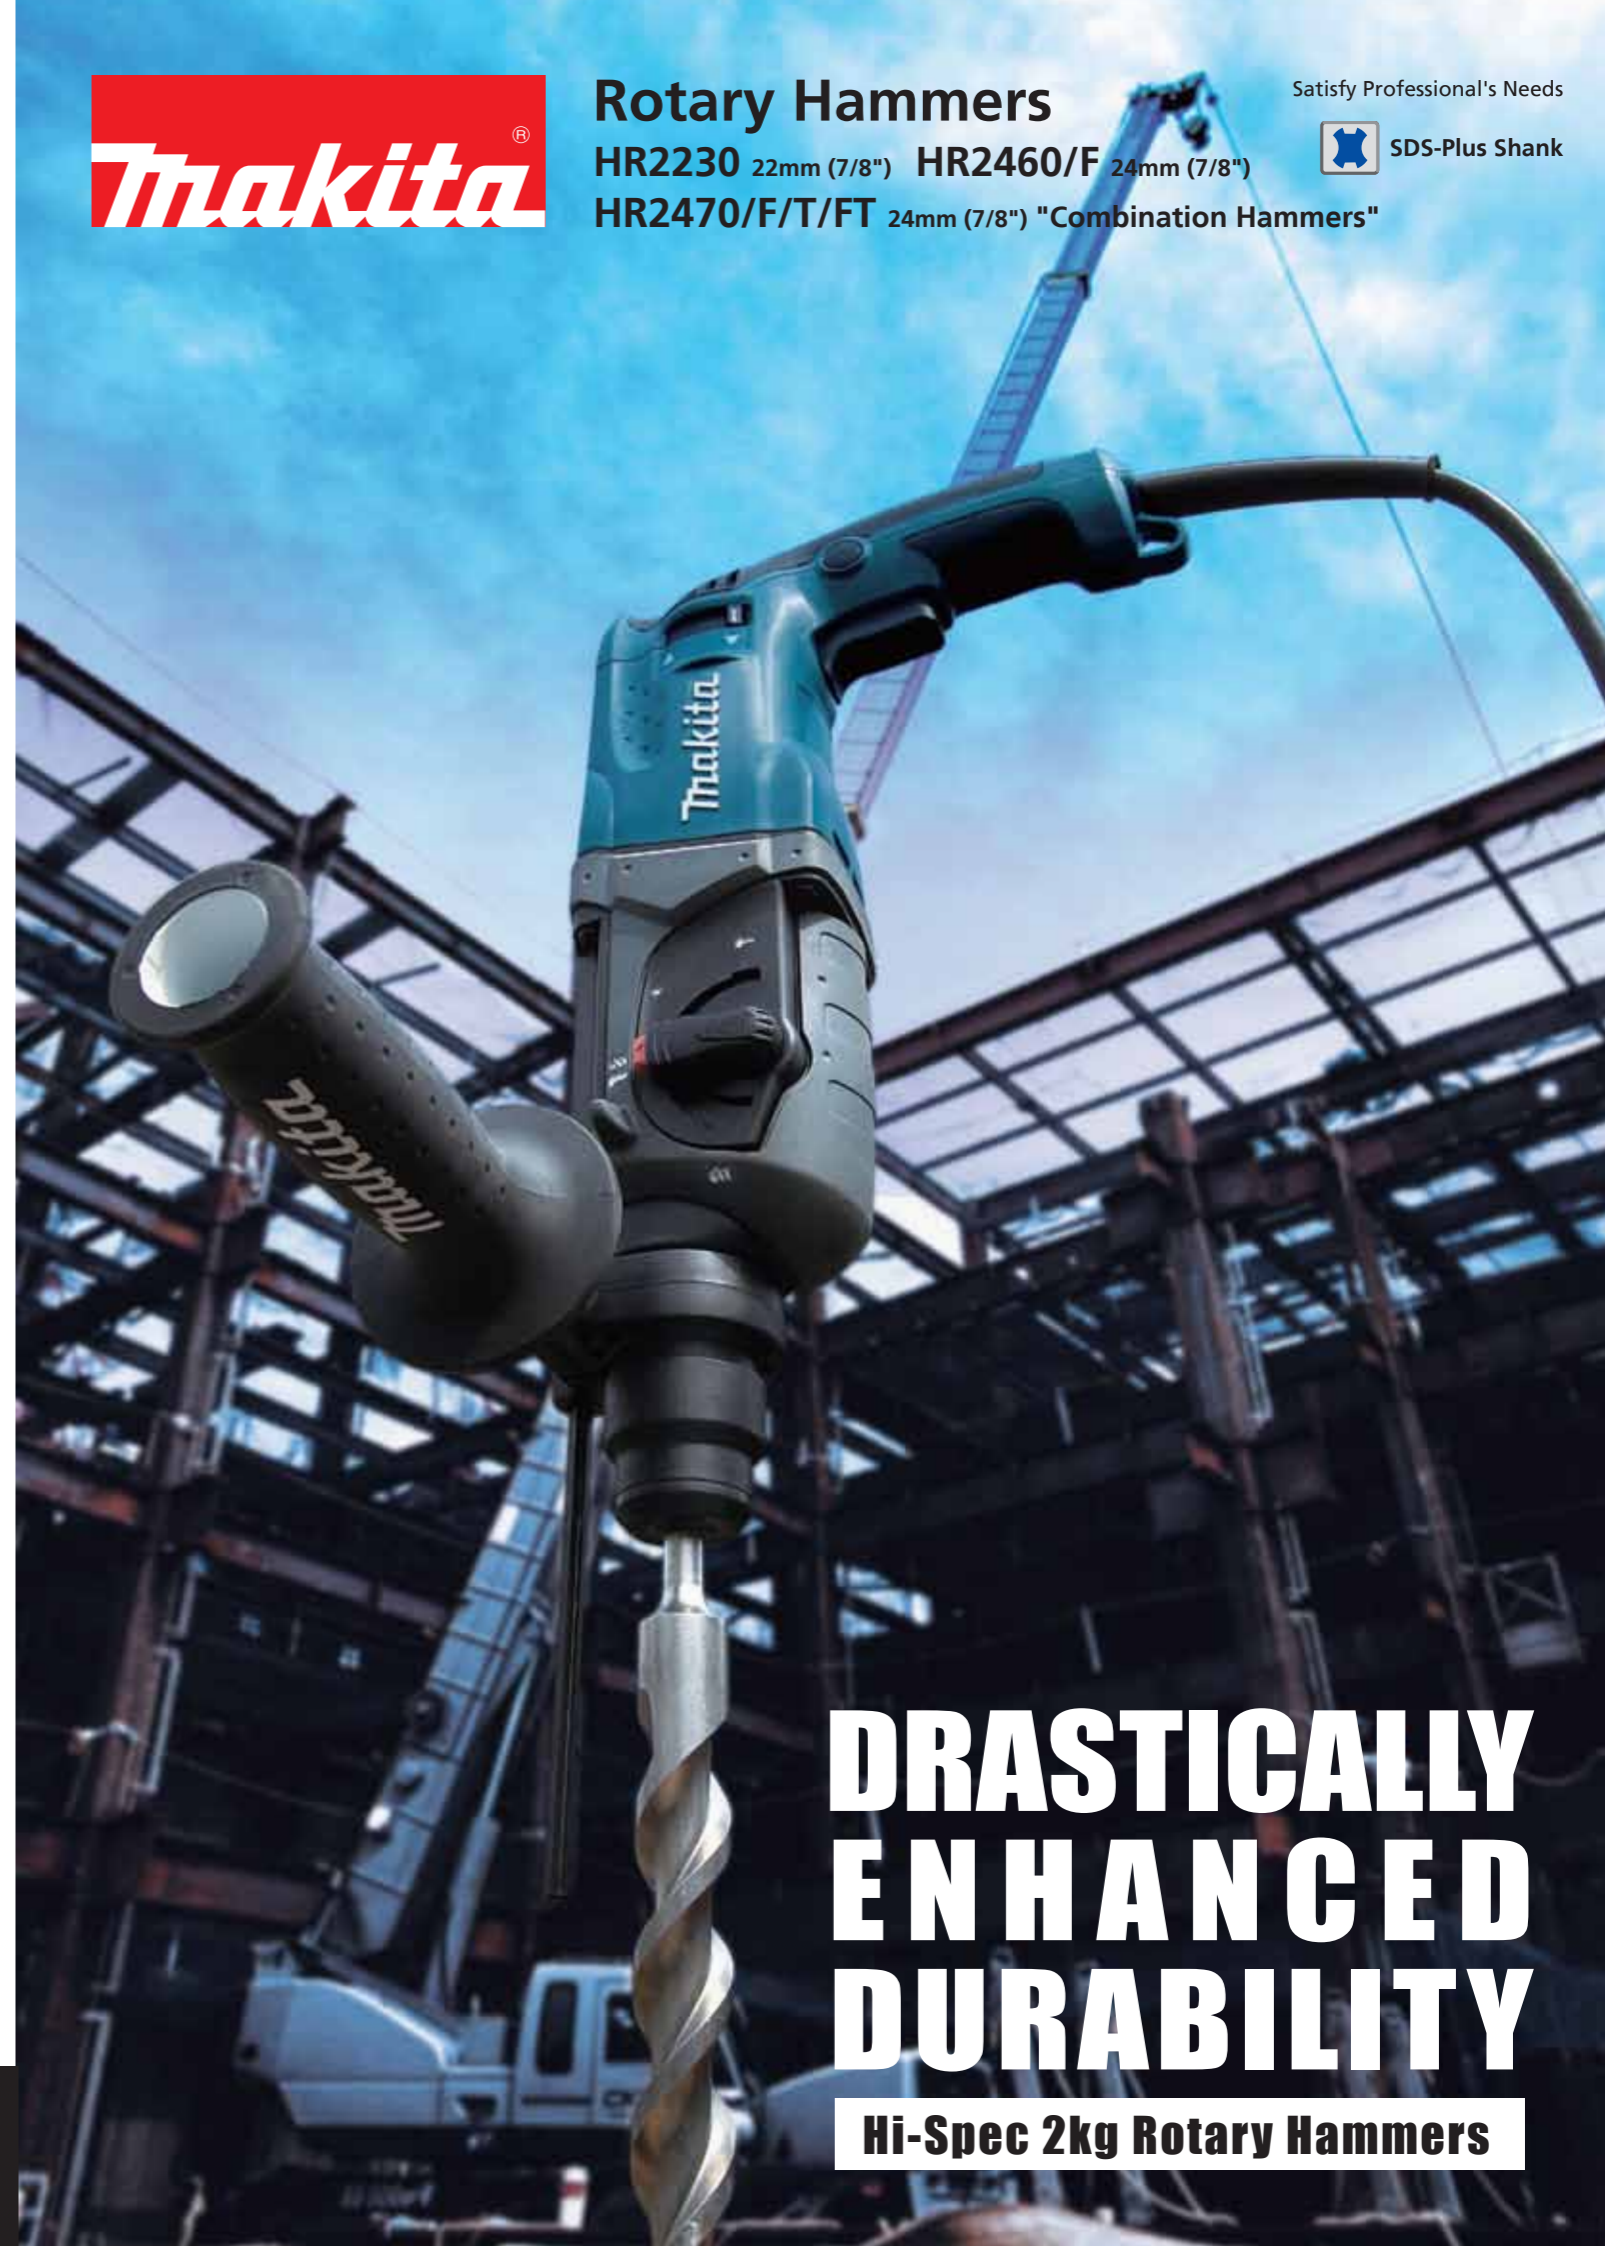

DRASTICALLY ENHANCED DURABILITY

Hi-Spec 2kg Rotary Hammers



Makita Power Tools India Pvt. Ltd.

Unit II Sy. Nos. 93/3 & 93/4, Koralur village, Kasaba Hobli, Hoskote Taluk, Bangalore - 560 067, INDIA. Tel: +91 80 2854 9008, Fax: +91 80 2854 9007
Email: sales@makita.in Website: www.makita.in

High Durability



- Added Durability to Impact Bolt
- Large Seal Ring eliminates grease leakage from matching surface between Inner Housing and Gear Housing.
- Varnish on armature protects from dust and wire-breakage.

Photo : HR2460F


Rotation Reversing System Using Brush Holder Unit

Features the following advantages:


- Protects Carbon Brush from foreign dusts and debris.
- Life of Carbon Brush is 2.7 times long as the existing models.
- Same speed and torque even in reverse rotation
- Saves time and labor for repair thanks to simplified wiring.



One-Touch Sliding Chuck
for Easy Bit Changes



Torque Limiter
:: When drill bit hits against reinforcements, Torque Limiter operates to stop.



No Hammering when Idling
Ensures machine's long life.



1 Lock-On Button
for Continuous Operation
2 Variable Speed



Bumper
Protects the surface of workpiece and machine.

Rubberized Grip
Provides more control and comfort.

LED Job Light
Illuminates the working spot.
(HR2460F, HR2470F/FT only)

24mm Combination Hammers

3 MODE

HR2470/ F

780 W 2.6 kg




LED Job Light
(HR2470F only)

HR2470T/ FT

780 W 2.8 kg



LED Job Light
(HR2470FT only)

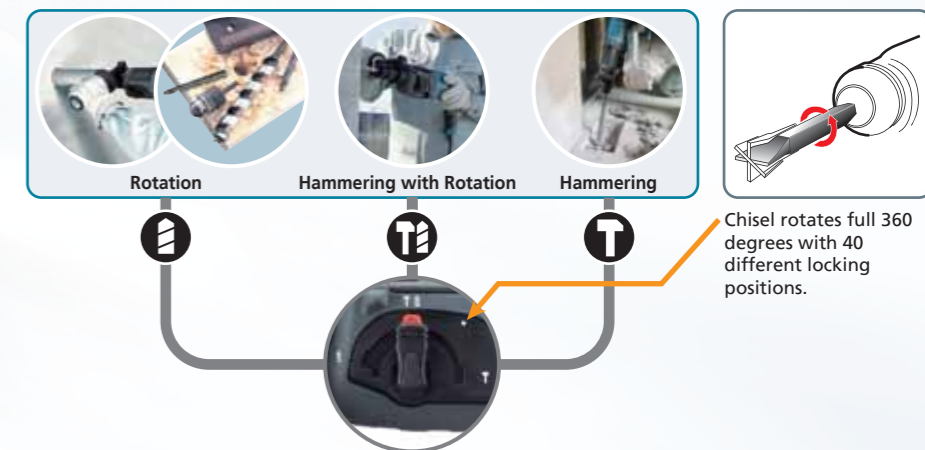

24mm Rotary Hammers

2 MODE

HR2460/ F

780 W 2.5 kg



LED Job Light
(HR2460F only)

22mm Rotary Hammer

2 MODE

HR2230

710 W 2.4 kg



Tool does not come with bit.